


ERCO C401 T E ERCO C361 T E









Configuration for flush installation

ERCO C401 T E - ERCO C361 T E



Electrohydraulic underbody scissors type lift, for tyre specialists, car workshops, and body repairers.

Runboards alignment by MASTER/SLAVE system



ADJUSTMENT BOLTS

Adjustment bolts with rubber to cushion the end of thr stroke.





SLIDING BLOCKS

Genenerously sized, self-lubricating sliding blocks.

INCLUDED ACCESSORIES

Self-lubricating bushings on all rotating parts Set of 4 rubber pads


RECOMMENDED ACCESSORIES

Pair of cross pieces and pads for off-road vehicles Kit for pit installations

See separate catalogue for further accessories.

TECHNICAL DATA

Model	Erco C401 T E	Erco C361 T E
Lift capacity	4000 kg	3600 kg
Lifting time	45 s	
Three phase motor	400/230V - 3kW - 3Ph - 50/60Hz	
Single phase motor	230V - 3kW - 1Ph - 50/60Hz	
Max. lifting height	2010 mm	
Lift min. height	290 mm	270 mm

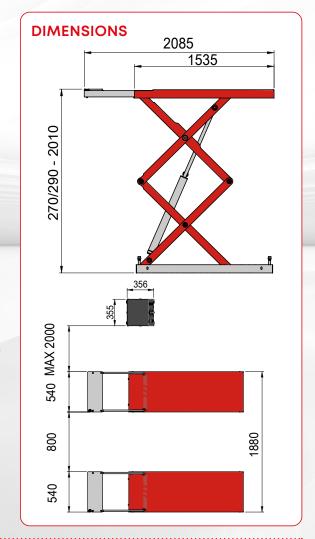

The manufacturer reserves the right to modify the features of its products at any time.











